

PRODUCT CATALOG



PREMIUM CAULKS AND SEALANTS



White Lightning®, the choice of building industry professionals and DIYers for nearly a century, has updated its packaging.

Our new cartridges make it easier to identify and choose the right product for your project. From all purpose caulks and sealants, to those designed specifically for windows and doors or kitchens and baths, White Lightning® has the right sealant for your project.

The White Lightning® brand team has gained a clear understanding of what our customers are looking for when they shop for caulks and sealants. These findings have been the inspiration for the updates to the White Lightning® brand and packaging.

Contents

ALL PURPOSE WL3–WL6

Superior flexibility and elasticity for a variety of interior and exterior uses.

SPECIALTY WL7–WL8

For concrete or mortar repair, roof repair and gutter lap installation.

FIRE BLOCK & FIRE STOP WL9–WL10

Prevent the spread of fire, smoke and toxic gas in UL rated and non-rated construction.

DRIPLESS® CAULK GUNS WL11

Efficient and lightweight caulk guns that are built to last.

We Have A Caulk for That

- Silky Smooth Texture**
 Finishes easily for a smooth, professional finish.
- Smooth Application**
 Special filling process removes air in cartridge, eliminating gaps, skips and bubbles.
- Non-Slump Formula**
 Extra-firm consistency and outstanding adhesion: won't run or sag before tooling.
- Paintable**
 Most caulks and sealants can be finished with quality paints (check individual products for paintable icon).
- Non-Yellowing**
 Formulas contain UV stabilizers to prevent fading and yellowing.
- Time-Saving**
 Premium product performance and smooth, even application prevents need for re-work.
- Easy Water Clean up**
 Water-soluble latex formulas clean up easily with water.

STANDARD ATTRIBUTE ICONS:



Professionals equate price with quality and value of a product, but sometimes that doesn't easily translate when comparing cartridges side by side. Beyond warranty, we chose to use colors and key selling features to differentiate the good, better and best products.

White Lightning® has also introduced bilingual on the new packaging. The new labels accommodate the expanding professional base by featuring English on one side and Spanish on the other, while staying true to the easy to read packaging architecture.



- Color
- Brand
- Product Name
- Key Selling Features
- Formula Description
- Premium Attribute Icons (EMR, UL, FBC, etc.)
- Warranty Icon
- Standard Attribute Icons
- QR Code
- ASTM Spec

Backside of label.

* Not all product images in the catalog will reflect new design.

Product colors shown on the following pages are an approximation and are not intended to be used for exact color matching.

Meets or exceeds the Federal Specifications of TT-S-001543A Class A (Com-NBS), TT-S-00230C Class A (COM-NBS). Exceeds performance requirements of ASTM C-920 Type S, Grade NS, Class 25 and CAN 2-19, 13-M82.



3006™ ALL PURPOSE ADHESIVE CAULK

White Lightning® 3006™ is a siliconized acrylic latex caulk perfect for most general purpose jobs. It has been a professional favorite for years. White Lightning® 3006™ is available in a variety of colors, including white and clear.

For use on: wood, drywall, metal, glass, vinyl, masonry and most plastics

- Smooth, professional application
- Excellent flexibility and elasticity
- Cured caulk is mildew and rust resistant
- Excellent color retention

Exceeds performance requirements of ASTM C-834.



PRODUCT	COLOR	SIZE
W12002010	Almond	10.0 fl.oz.
W12003010	Brown	10.0 fl.oz.
W12001005	Clear	5.5 fl.oz.
W12001010	Clear	10.0 fl.oz.
W12004010	Gray	10.0 fl.oz.
W12AF0005	White	5.5 fl.oz.
W12AF0010	White	10.0 fl.oz.

RTV ALL PURPOSE SILICONE SEALANT

RTV All Purpose Silicone Sealant is a 100% medium modulus, single component silicone sealant that cures to form a tough, rubber-like seal. It can be applied overhead or on wall joints without sagging, slumping or running. Ideal for caulking and sealing joints in precast form work and sealing windows, doors, gutters and soffits.

For use on: clean metal, glass, most types of wood, silicone resin, vulcanized silicone rubber, ceramic, painted surfaces and many plastics

- Good resistance to weathering, vibration, moisture, ozone and extreme temperatures
- It may be applied in low temperatures -20°F to 122°F (-29°C to 50°C)

RTV All Purpose Silicone Sealant can corrode or may not adhere to copper, brass, magnesium, zinc and galvanized metals. For best results on these surfaces, use Silicone Ultra All Purpose Sealant.



PRODUCT	COLOR	SIZE
WL099111B	Black	10.0 fl.oz.
WL099110C	Clear	10.0 fl.oz.
WL099112W	White	10.0 fl.oz.

3006 ULTRA® ALL PURPOSE ELASTOMERIC SEALANT

3006 Ultra® is a premium sealant featuring outstanding flexibility and adhesion to most surfaces. An excellent choice for any caulking project, it is ideal for filling joints where high levels of movement are expected. Commonly applied to windows, doors, trim, siding, tubs, showers, sinks, toilets, splashboards, countertops and other high movement joints.

For use on: drywall, wood, glass, vinyl, masonry, concrete, stucco, metal, porcelain and many plastics

- 40% more flexible than standard latex caulks
- Dries non-tacky – limits dirt pickup
- Bright white finish
- Paintable
- Water clean up
- Interior/exterior use

Exceeds performance requirements of Federal Specification TT-S 00230C Type II, Class A and meets performance requirements of ASTM C-920, Class 35.

Tested at Riverbank Acoustical Laboratories in accordance with ASTM E-90 and C-919, this product was sound tested and proven to be an integral component in maintaining STC/MTC partition ratings. It has also been tested in accordance with ASTM C- Stet and D-217.



PRODUCT	COLOR	SIZE
W11002010	Almond	10.0 fl.oz.
W11005010	Black	10.0 fl.oz.
W11006010	Cedar	10.0 fl.oz.
W11001005	Clear	5.5 fl.oz.
W11001010	Clear	10.0 fl.oz.
W11004010	Gray	10.0 fl.oz.
W11000005	White	5.5 fl.oz.
W11000010	White	10.0 fl.oz.

SILICONE RUBBER ALL PURPOSE SEALANT

This highly flexible, non-shrinking 100% silicone sealant features outstanding protection against water and weather damage. Its excellent durability and flexibility make it the perfect sealant for areas exposed to heavy wear and harsh elements. Commonly applied to windows, doors, trim, siding and in many other general purpose applications.

For use on: ceramic tile, porcelain, vinyl, wood and glass

- Highly flexible, watertight seal
- Non-shrinking
- Resists moisture and mildew
- RTV formula
- Excellent adhesion*
- Interior/exterior use

Meets or exceeds Federal Specifications of TT-S-001543A Class A (COM-NBS) for silicone building sealants, TT-S-00230C Class A (COM-NBS) for one-component sealants. Exceeds performance requirements of ASTM C-920, Class 25. NSF and USDA listed.

*Not for use on porous natural materials such as granite, marble, masonry and some metals. Curing process can cause lack of adhesion and may harm these materials. For best results on these surfaces, use Silicone Ultra All Purpose Sealant.



PRODUCT	COLOR	SIZE
W11127010	High Heat Red	10.0 fl.oz.
W11124510	Aluminum	10.0 fl.oz.
W11125010	Black	10.0 fl.oz.
W11121005	Clear	3.0 fl.oz.
W11121010	Clear	10.0 fl.oz.
W11120010	White	10.0 fl.oz.



SILICONE ULTRA ALL PURPOSE SEALANT



This 100% silicone product is the perfect choice for many interior applications. Its durability, UV resistance and superior expansion and contraction capabilities also make it an excellent choice for exterior jobs. It is commonly applied at windows, doors, trim and in many other general purpose applications.

For use on: ceramic tile, wood, glass, fiberglass, vinyl, metal and most plastics

- Water/weathertight seal
- Permanently flexible
- Non-shrinking, non-yellowing formula

Meets or exceeds the Federal Specifications of TT-S-001543A Class A (Com-NBS), TT-S-00230C Class A (COM-NBS). Exceeds performance requirements of ASTM C-920 Type S, Grade NS, Class 25 and CAN 2-19, 13-M82.

PRODUCT	COLOR	SIZE
W11111010	Clear	10.0 fl.oz.
W11110010	White	10.0 fl.oz.



PAINTER'S PREFERRED® ACRYLIC LATEX CAULK



Painter's Preferred® is an economical general purpose product suitable for sealing multiple interior/exterior cracks and joints. Ideal for use on doors, windows and trim.

For use on: wood and glass

- Paintable
- Water clean up
- Interior/exterior use

Meets ASTM Specification C-834, Grade NF.

PRODUCT	COLOR	SIZE
W13000010	White	10.0 fl.oz.

PAINTABLE SILICONE ALL PURPOSE HYBRID



White Lightning® Paintable Silicone All Purpose Sealant is a high-performance sealant that is 3-hour Water Ready and 30-minute Paint Ready. It features excellent adhesion to most surfaces.

For use on: wood, glass, steel, aluminum, vinyl siding, trim and different types of plastics

- Paintable like a latex, performance of silicone
- Outstanding adhesion and flexibility
- Weather and UV resistant
- Provides a watertight seal
- Won't crack, shrink or crumble over time
- Interior/exterior use
- Low VOC
- Fast curing even at low temperatures
- Non-yellowing

Meets or exceeds performance requirements of ASTM C-920, Class 35.

PRODUCT	COLOR	SIZE
W31202210	White	9.0 fl.oz.

WHITE LIGHTNING® PROVALUE™



White Lightning® ProValue™ is a general purpose caulk suitable for sealing openings around doors, windows and trim work.

For use on: wood, drywall and plastics

- Provides quality paintable surface
- Water clean up
- Interior/exterior use

Meets performance requirements of ASTM C-834, Type OP, Grade -18°C.

PRODUCT	COLOR	SIZE
WL0009650	White	10.0 fl.oz.



STOP GAP!® MINIMAL & TRIPLE EXPANDING INSULATING FOAM

These products expand to take the shape of gaps and crevices, forming an airtight and waterproof bond to most surfaces. STOP GAP!® dries tack free in 30 minutes and cures in 8 hours. It can be trimmed, sanded and painted. Exposure to sunlight will cause discoloration. Exterior usage requires painting.

For use on: wood, metal, masonry, glass and most plastics

- Fills and insulates gaps and cracks
- Water resistant
- Fire retardant

PRODUCT	COLOR	SIZE
MINIMAL EXPANDING WL1111100	Tan	12.0 fl.oz.
TRIPLE EXPANDING* WL3333300	Tan	12.0 fl.oz.
TRIPLE EXPANDING* WL3333320	Tan	20.0 fl.oz.

*Triple expanding foam should not be used to seal openings around windows and doors.



POLYURETHANE ONE-COMPONENT SEALANT - SMOOTH



This polyurethane one-component sealant is moisture cure, non-sag and gun grade. It is designed for a wide range of sealing applications in joints subject to structural movement. After curing, this sealant exhibits a flexible, resilient, rubber-like appearance that adheres to a wide variety of substrates and provides up to 70% total joint movement. It is especially effective between joints of dissimilar substrates. Commonly applied to window frames, doors, skylights, foundations, concrete driveways, expansion wall joints, fascia and siding.

For use on: concrete, cement, cementitious board, masonry, brick, stucco, wood, vinyl and aluminum

- Superior adhesion to many substrates
- Resists deterioration due to extreme weather, stress, movement, water and many chemicals
- Paintable after full cure
- Easy application
- CARB Compliant formulation

PRODUCT	COLOR	SIZE
W42200010	White	10.1 fl.oz.
W42204110	Limestone	10.1 fl.oz.

Meets or exceeds the test requirements of ASTM C-920, Class 35, Type S, Grade NS, Use-NT, A, M, G, O. Federal Specification TT-S-00230C, Type II, Class A, Non-sag, One Component, CGSB 19, GP-13.



STORM BLASTER® ALL WEATHER CONSTRUCTION SEALANT



This super-elastomeric sealant is ideal for exterior use in extreme weather. It can be applied to cold or wet surfaces and still retain its excellent adhesion.

For use on: glass, wood, metal, paint, concrete, asphalt, brick, tile, fiberglass and most plastics

- Can be applied to wet and oily surfaces!
- Excellent adhesion and permanently flexible
- Can be applied in temperatures ranging from 0 °F to 140 °F
- Exterior use

PRODUCT	COLOR	SIZE
W41401010	Clear*	10.0 fl.oz.
W41000010	White**	10.0 fl.oz.

*Unavailable in SCAQMD-CA.
**Unavailable in CA.



SPEED GRIP® CONSTRUCTION ADHESIVE



White Lightning® Speed Grip® Construction Adhesive provides instant grab on most porous and non-porous surfaces. It is ideal for interior applications and bonds quickly to a variety of surfaces.

For use on: plastics, wood, concrete, brick, plasterboard, carpet, metal and more

- Instant grab on most surfaces
- Provides high strength bond
- Paintable
- Latex formula - water clean up

PRODUCT	COLOR	SIZE
W70100010	White	9.0 fl.oz.



FLAME BUSTER® HIGH HEAT FIRE & SMOKE BLOCKING LATEX CAULK



This latex caulk is designed to resist high temperatures and smoke in non-rated construction.

For use on or around: wires, pipes, ducts and vents in wood or steel framed non-rated construction

- Resists temperatures up to 1380 °F
- Blocks drafts, smoke and fire
- Easy application and clean up

Meets ASTM E-136.

PRODUCT	COLOR	SIZE
W44017010	Red	10.0 fl.oz.



FLAME BUSTER® FIRE & SMOKE BLOCKING SILICONE SEALANT



This premium silicone sealant is designed to block the spread of smoke and fire. It forms a water resistant seal that will also resist smoke and toxic gases, ultraviolet radiation and ozone.

For use on: copper and other metal through-penetrations

- Will withstand temperatures up to 300 °F
- Resists cracking
- Can be applied in temperatures ranging from -20 °F to 122 °F

Meets ASTM E-814 (UL1479) and UBC 7-5.
Meets ASTM C-920, Class 25.



PRODUCT	COLOR	SIZE
WL8802020	Red	10.0 fl.oz.



FLAME BUSTER® INTUMESCENT LATEX CAULK




(after inspection)

White Lightning® Flame Buster® Intumescent Latex Caulk is an elastomeric, intumescent sealant that expands when exposed to fire or extreme heat, forming an insulated char. Flame Buster® Intumescent Latex Caulk will prevent the spread of toxic gases, smoke and fire. It is suitable for adhesion to almost any surface and remains flexible, making it ideal for both horizontal and vertical joints, subject to vibration or dynamic movement. Flame Buster® Intumescent Latex Caulk can be used for interior or exterior applications and can be painted (after inspection).

For use on or around: wires, pipes, ducts and vents

- Expands to 5 times original volume (at 600°F)
- Interior/exterior use
- Remains flexible
- VOC compliant
- Safe to handle
- Water clean up

Meets ASTM E-814 (UL1479) and meets the criteria for fire/smoke/draft stop for CABO - UBC - SBCCI - IRC, IBC.



PRODUCT	COLOR	SIZE
W44007010	Red	10.0 fl.oz.



FLAME BUSTER® INTUMESCENT SILICONE SEALANT



This expanding, neutral cure intumescent sealant is designed to prevent the spread of fire, smoke and toxic gases. When exposed to temperatures above 300 °F, it expands to fill the voids left by collapsed materials.

For use on: PVC and other plastic through-penetrations

- Expands at temperatures over 300 °F
- Expands to 6 times original volume (at 662 t)

Meets specifications ASTM E-814 (UL1479), ASTM E-84 (UL723), UBC 7-5. Meets ASTM C-920, Class 25.



PRODUCT	COLOR	SIZE
W44107010	Red	10.0 fl.oz.

DRIPLESS® CAULK GUNS



Dripless® CG10 No Drip Caulk Gun

- Smooth rod for easy application
- Lightweight metal
- Large ladder hook

PART NO.	UPC	CASE QTY.
99000CG10	0 78435 00095 7	6



Dripless® CR200 HD Cradle Gun Ratchet Drive

- Commercial model
- Handles more viscous, stiff materials


PART NO.	UPC	CASE QTY.
.01551969-99	7 64509 01220 8	12



Dripless® CG20 No Drip Hex-Rod Contractor Caulk Gun

- Sturdy steel construction
- Hex-rod with productive thrust ratio
- Built-in tip cutter
- Tip clean-out tool
- Large ladder hook

PART NO.	UPC	CASE QTY.
99000CG20	0 78435 00096 4	6

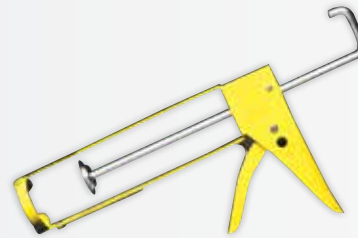

Dripless® SH200 Skeleton Hex Rod

- Commercial grade frame gun
- Heavy steel wraparound bars

PART NO.	UPC	CASE QTY.
.01551944	7 64509 01210 9	12



Dripless® C050 Economy Gun

- Economy grade
- Smooth round rod
- Cradle frame
- 5:1 thrust ratio

PART NO.	UPC	CASE QTY.
.04477105	7 64509 01050 1	12



Dripless® SI200 Skeleton Industrial Gun

- Commercial grade unit
- Easy grip handle
- Extra-long seal punch
- Ideal for applying heavy urethanes and painter's caulk

PART NO.	UPC	CASE QTY.
.04507554-99	7 64509 01240 6	6

DRIPLESS® CAULK GUNS



DripleSS® SI300 10 oz. Industrial High Performance

- 16:1 ratio
- Engineered for frequent, heavy duty use
- Rotating barrel
- Drip/No Drip option for bead control
- Ladder hook, seal punch and extra-sharp cutter

PART NO.	UPC	CASE QTY.
.09086216	7 64509 01300 7	6



DripleSS® ETS5000 29 oz. Industrial Grade

- 18:1 ratio
- Rotating barrel
- Drip/No Drip option
- High quality peened rod
- Powder metal drive dog

PART NO.	UPC	CASE QTY.
WL9905000	7 64509 01005 1	6



DripleSS® ETS2000 10 oz. Professional Grade

- 12:1 ratio
- 40% lighter than comparable models
- Rotating barrel
- Full-time, patented dripleSS feature
- High quality peened rod
- Powder metal drive dog

PART NO.	UPC	CASE QTY.
WL9902000	7 64509 01002 0	6



DripleSS® ETS3000 10 oz. Industrial Grade

- 18:1 ratio
- Rotating barrel
- Drip/No Drip option
- High quality peened rod
- Powder metal drive dog

PART NO.	UPC	CASE QTY.
WL9903000	7 64509 01003 7	6



DripleSS® ETS6000 10 or 20 oz. Sausage Pack Caulker

- 18:1 ratio
- Patented ERGO/TECH grip
- 2-1/8" diameter rotating barrel
- Specialty hardened rod
- Quick release caps
- Comes with 6 precision-fitting nozzles in two sizes
- Optional Drip/No Drip feature

PART NO.	UPC	CASE QTY.
WL9906000	7 64509 01006 8	1

2320° & 2321 CONSTRUCTION TRIPOLYMER GUTTER & NARROW SEAM SEALANT



A single-component, elastomeric, semi-self-leveling, high-performance tripolymer sealant designed to prevent the passage of air and moisture through small joints or seams.

For use on: asphalt shingles, brick (masonry), concrete, glass, vinyl, wood, sheet metal and more

- Excellent adhesion to many building surfaces, even when damp or oily
- Exceptional UV resistance
- Paintable
- Easy cleanup
- Asphalt shingle compatible
- Available in a 10 oz. cartridge and 5 oz. squeeze tube

Do not use in potable water applications.

PRODUCT	CANADA	COLOR	SIZE
GC67000	GC67800	Clear	5 fl. oz.
GC67001	GC67801	White	5 fl. oz.
GC67002	GC67802	Aluminum Gray	5 fl. oz.
GC67100	—	Clear	10.3 fl. oz.
GC67101	—	White	10.3 fl. oz.
GC67102	—	Aluminum Gray	10.3 fl. oz.

GEOCEL PRO® GUTTER SEAL HYBRID SEALANT



A high-performance hybrid sealant specifically designed for small joints and seams found in the repair and installation of gutters.

For use on: aluminum, brick, concrete, galvanized steel, coated steel (Kynar 500® based finishes), vinyl, wood and more

- Applies, adheres and cures underwater
- High tack, fast curing
- Weather and UV resistant
- Remains flexible
- Minimal shrinkage

Do not use in potable water applications.

PRODUCT	CANADA	COLOR	SIZE
GC54101	—	White	10.3 fl. oz.
GC54102	—	Aluminum Gray	10.3 fl. oz.

Kynar 500® is a registered trademark of Arkema Inc., and is used under license.

GEOCEL 3900™ TEXTURED POLYURETHANE SEALANT



Single-component, high-performance sealant that is textured to look like mortar. It bonds to both porous and nonporous surfaces while remaining flexible. Paintable. Meets ASTM C-920. Ideal for use on panel-to-panel joints and nonstructural mortar repair.

For use on: stone, concrete, brick, stucco and more

- Textured to look like mortar
- Remains flexible
- Paintable
- Ideal for nonstructural mortar repairs

Meets ASTM C-920, Type S, Grade NS, Class 25, Use NT, A, G and M.

PRODUCT	CANADA	COLOR	SIZE
GC39102	GC39802	Gray	10.1 fl. oz.

S2° & S4° SOLAR PANEL ROOF INSTALLATION SEALANTS



These sealants are ideal for use in the installation of solar panels to various roof decks. Tenacious adhesion to common roof substrates, even less than perfect conditions.

S2 Solvent Based Sealant

- Asphalt shingle compatible
- Exceptional flexibility
- UV-resistant
- Excellent adhesion to many roof surfaces, even when damp
- Easily applied, non-stringing formulation

S4 Hybrid Sealant

- Applies in damp or dirty conditions
- Remains flexible
- Minimal shrinkage
- Paintable

PRODUCT	PRODUCT #	COLOR	SIZE
S2	GC62700	Clear	10.0 fl.oz.

May not be sold in the state of California. Clear is exempt from this rule except in SCAQMD counties.

Kynar 500® is a registered trademark of Arkema Inc. and is used under license.

PRODUCT	PRODUCT #	COLOR	SIZE
S4	GC64703	Black	10.0 fl.oz.

Meets ASTM C-920, Type S, Grade NS, Class 50, Use NT, A, G and M.

1500SL™ PREMIUM SELF-LEVELING CONCRETE JOINT & CRACK SEALANT



High-performance one-part, moisture-curing, self-leveling sealant for concrete or asphalt joints. Its nongassing property makes it ideal for high temperatures and humid conditions. Remains flexible, has excellent adhesion and UV resistance, is nonpriming on most substrates and is asphalt compatible (black only).

For use on: asphalt, concrete, masonry, mortar and more

- Nongassing
- Remains flexible
- Excellent adhesion and UV resistance
- Nonpriming on most substrates

PRODUCT	CANADA	COLOR	SIZE
GC99902	—	Gray	28 fl. oz.



**4350™
METAL ROOF & SIDING SEALANT**

Provides a strong, lasting bond to a wide variety of substrates. Geocel® 4350 stays flexible and can be applied in extreme wet or dry conditions and temperatures as low as 0 °F.

For use on: Metal roofing, wood, stone, concrete, glass, tile, brick, asphalt shingles and more

Provides a strong and lasting bond to:

- PVDF
- SMP
- Polyester-coated steel
- Bare galvanized steel
- Galvalume®
- Aluminum
- Copper
- Skylights
- Glass
- Brick
- Block
- Wood
- Vinyl siding

Features and Benefits:

- Minimal shrinkage
- Fast curing
- Remains flexible
- UV-resistant
- Applies in damp or dry conditions
- Paintable with latex-based paints
- Meets ASTM C-920, Type S, Grade NS, Class 50, Use NT, A, M and G

**GEOCEL 4350 (Canada Only)
CONSTRUCTION SEALANT**



CANADA	COLOR	SIZE
GC58181	Limestone	295 mL
GC58182	Tan	295 mL
GC58281	Black	295 mL
GC58485	Dark Bronze	295 mL
GC58486	Medium Bronze	295 mL
GC58581	Gray	295 mL
GC58783	Terra Cotta	295 mL
GC58881	White	295 mL

PRODUCT	COLOR	SIZE
GC43530	Black	10.0 fl.oz.
GC43570	Hawaiian	10.0 fl.oz.
GC43571	Cobalt Blue	10.0 fl.oz.
GC43540	Chestnut	10.0 fl.oz.
GC43541	Burnished Slate	10.0 fl.oz.
GC43542	Deep Bronze	10.0 fl.oz.
GC43560	Hemlock	10.0 fl.oz.
GC43561	Evergreen	10.0 fl.oz.
GC43562	Fern	10.0 fl.oz.
GC43520	Dove Gray	10.0 fl.oz.
GC43521	Fawn	10.0 fl.oz.
GC43522	Nantucket Gray	10.0 fl.oz.
GC43523	Granite	10.0 fl.oz.
GC43543	Buckskin	10.0 fl.oz.
GC43590	Metallic Copper	10.0 fl.oz.
GC43591	Metallic Silver	10.0 fl.oz.
GC43550	Crimson	10.0 fl.oz.
GC43551	Radiant Red	10.0 fl.oz.
GC43552	Rustic Red	10.0 fl.oz.
GC43553	Countryside Red	10.0 fl.oz.
GC43554	Maroon	10.0 fl.oz.
GC43510	Stonework	10.0 fl.oz.
GC43511	Saddle Tan	10.0 fl.oz.
GC43512	Desert Sand	10.0 fl.oz.
GC43580	Linen White	10.0 fl.oz.



**GEOCEL 4300®
CLEAR SEALANT**

High performance, chemically curing clear sealant that offers excellent adhesion to many substrates. Geocel 4300 Clear Sealant can be used as an interior/exterior sealant, can withstand adverse weather conditions and is tolerant to damp surfaces*.

For use on: wood, concrete, metal, glass, tile, brick and more

- Minimal shrinkage
- Remains flexible
- UV resistant
- Applies in damp or dry conditions*
- Paintable with latex-based paints

Meets ASTM C-920, Type S, Grade NS, Class 25, Use NT, A, G and M.

*Damp surfaces will not interfere with product performance. However, sealant may become cloudy in appearance.

PRODUCT	CANADA	COLOR	SIZE
GC58000	GC58800	Clear	9.5 fl. oz.



**4600
STRUCTURAL ADHESIVE SEALANT SEALANT**

- One comprehensive sealant for a variety of construction applications
- High viscosity sealant—will not slump
- Stays flexible, exceeds rigorous ASTM C-920 Class 35
- Apply wet or dry in challenging weather conditions, down to 0 °F
- Use on wet or dry roof surfaces, even underwater

Strong lasting bond on:




- Skylight frames
- Metal flashings
- Wood
- Concrete/masonry
- Glass
- HVAC components
- Roof substrates

PRODUCT	CANADA	COLOR	SIZE
GC46101	GC46801	White	10.1 oz.
GC46102	GC46802	Gray	10.1 oz.
GC46103	GC46803	Black	10.1 oz.
GC46105	—	Bronze	10.1 oz.
GC46106	—	Limestone	10.1 oz.
GC46107	—	Tan	10.1 oz.



**1200
POLY MESH FABRIC**

For use in applications with 2010 Sealant, 2310® Sealant, RP-400 Sealant and 2315LRF® Repair Coating as a reinforcement.

PRODUCT	CANADA	COLOR	SIZE
GC12004	GC12004	White 	4"
GC12006	GC12006	White 	6"
GC12012	GC12012	White 	12"






**RP-400®
PLASTIC WET-DRY ROOF CEMENT**

A single-component, asbestos-free, asphalt-based cement designed for many construction, roofing, manufacturing and industrial applications. Use on wet or dry roof surfaces, even underwater. Formulated to seal quickly; will not pull apart or lose its bond.

For use on: asphalt shingles, modified bitumen, steel, brick, wood, aluminum and more

- Ideal for patching and roof maintenance
- Use as a shingle tab cement
- Seals vents, pipes, chimneys and gutters
- Remains soft and pliable
- Resists temperature change

Meets Specifications ASTM D-4586 Type 1, Class II.

PRODUCT	CANADA	COLOR	SIZE
GC01103	GC41803	Black 	10 fl. oz.
GC01101	—	Black 	1 Gallon
GC01104	—	Black 	5 Gallon













**SHINGLE
AND FLASHING
ROOF ACCESSORY PAINT**

A fast-drying aerosol enamel with built-in corrosion protector used to hide flaws, blemishes and unsightly roof protrusions. It provides superior protection, durability and adhesion. Adds the final touch with a professional finish. Provides a smooth, durable, rust-fighting finish that prevents stains.

For use on: asphalt shingles, aluminum, metal, PVC, other plastics and more

- Provides a finishing touch
- Smooth, durable finish
- Dries in 8 minutes or less
- Available in 13 colors

PRODUCT	CANADA	COLOR	SIZE
GC91101-6X	—	White 	12 fl.oz.
GC91102-6X	—	Weathered Wood 	12 fl.oz.
GC91104-6X	—	Brown 	12 fl.oz.
GC91108-6X	—	Cedar 	12 fl.oz.
GC91110-6X	—	Forest Green 	12 fl.oz.
GC91124-6X	—	Gray 	12 fl.oz.
GC91127-6X	—	Medium Red 	12 fl.oz.
GC91131-6X	—	Slate 	12 fl.oz.
GC91132-6X	—	Charcoal Gray 	12 fl.oz.
GC91133-6X	—	Dark Gray 	12 fl.oz.
GC91134-6X	—	Deep Brown 	12 fl.oz.
GC91135-6X	—	Terra Cotta 	12 fl.oz.
GC91136-6X	—	Birchwood 	12 fl.oz.
GC91151-6X	—	Hickory 	12 fl.oz.




ASPHALT PRIMER

Geocel® Asphalt Primer is an asphalt-based material designed for priming a variety of surfaces to provide a firm base and improved adhesion of hot-mopped or cold-applied coatings. The unique heavy-bodied formula eliminates wind drift during application while providing maximum bonding to porous and non-porous surfaces.

For use on: Asphalt, metal, concrete, masonry, brick and other surface materials

- Heavy-bodied formula to eliminate wind drift
- Primes a variety of surfaces
- Provides a smooth protective film
- Traps and encapsulates dust and other loose particles
- 100% asbestos free

PRODUCT	CANADA	COLOR	SIZE
GC01901	—	Black 	14.0 fl.oz.




GALVANIZING PRIMER

Geocel Galvanizing Primer is used on galvanized surfaces to prevent corrosion and superior protection. Primers can be used in instances that require additional corrosion protection beyond what shingle and flashing paint will provide — zinc fuses to the metal surface and prevents rust creepage, even if the finish becomes scratched.

For use on: all metal surfaces, gutters, downspouts, structural steel, galvanized surfaces, piping and more

Galvanizing Primer

- Eliminates worries of rust corrosion
- Protects in the harshest elements
- Dries in 15 minutes
- Prevents rust creep, even on scratched surfaces

PRODUCT	CANADA	COLOR	SIZE
GC91901	—	Gray 	12 fl.oz.

- 92% pure zinc suitable for weld-through application
- Use over existing galvanized surfaces that require repair

RECOMMENDED USES: All metal surfaces, gutters, downspouts, structural steel, galvanized surfaces, piping and more.



PATENT PENDING

4525™ SEMI-SELF-LEVELING SEALANT

This patent pending vv® technology sealant is ideal for use with pitch pans and in small-area, flat roof repairs. It requires no mixing and can be used in damp or dry conditions. Simply pour it in place and it cures to form a weather resistant, durable seal for pitch pans, pockets and roof repair applications. No priming required on most substrates. Will not distort due to weather, stress, water, movement or aging.

For use on: EPDM, primed TPO, primed PVC, metal, asphalt shingles, concrete and more

- For pitch pans and repairs
- Semi-self-leveling
- One-part, no mixing
- Compatible with Geocel 4500® Roof Bonding Sealant
- Remains flexible
- Adheres to many common building substrates

PRODUCT	CANADA	COLOR	SIZE
GC55423	GC55433	Black	4 pk./67 oz. pouches
GC55323	GC55333	Black	67 fl. oz.

See page G8 for a complete pitch pan system including 4525 Sealant.



PATENT PENDING

GEOCEL PRO FIT® POCKET PENETRATION SEALANT SYSTEM

This patent pending System is a universal, easy solution for sealing roof penetrations that is high in value, low in waste. Included in the System are all the materials needed to start and finish the job, whether it's for single or multiple small roof penetrations. Each System comes with: 2" System – one 56"x2" Pocket, one 10 fl. oz. cartridge of Geocel 4500® Roof Bonding Sealant in black, one 67 oz. pouch of 4525™ Semi-self-leveling Sealant in black, two self-tapping screws and one troweling tool; 4" System – all the same materials as the 2" System except the Pocket is 56"x4" and one additional 67 oz. pouch of 4525™ Semi-self-leveling Sealant is included. It installs in 15 minutes or less with no flashing, priming or complicated roof expertise required. The flexible pocket is easily shaped and requires no complex cutting or assembly.

For use on: EPDM, primed TPO, primed PVC, BUR, metal, asphalt and other roofing substrates

- Fits penetrations that prefabricated pockets and pans cannot
- Install in damp conditions
- Create single or multiple pockets from one 56" pocket
- Quick, easy installation with few tools
- Available in 2" and 4" heights

PRODUCT	CANADA	COLOR	SIZE
GC55852	GC55862	Black	2" x 56"
GC55854	GC55864	Black	4" x 56"



PATENTED DESIGN

GEOCEL PRO FIT® POCKET

The patented Geocel Pro Fit Pocket is a highly flexible, easy solution for sealing roof penetrations. The Pocket is easily shaped to fit around even the most challenging configuration without the complex cutting or assembly found with other pockets and pans. It installs in under 15 minutes with no flashing, priming or complicated roof expertise required. The Geocel Pro Fit Pocket is 56" in length and comes in heights of 2" or 4".

For use on: EPDM, TPO, PVC, BUR, metal, asphalt and other roofing substrates

- Fits penetrations that prefabricated pockets and pans cannot
- Install in damp conditions
- Create a single or multiple pockets from one 56" pocket
- Quick, easy installation with few tools
- Available in 2" and 4" heights

PRODUCT	CANADA	COLOR	SIZE
GC55812	GC55812	Black	2" x 56"
GC55814	GC55814	Black	4" x 56"



GEOBOND® ROOF BONDING TAPE

Features advanced S-Polymer technology that prevents plasticizer migration often associated with other tapes. GeoBond Roof Bonding Tape is used to seal holes, tears and seams in gutters, flashings, skylights, roofing membranes and more. GeoBond Roof Bonding Tape applies and adheres to damp surfaces below 0 °F, and maintains its thermal stability up to 300 °F.

For use on: TPO, PVC, EPDM, metal, asphalt and vinyl

- Prevents plasticizer migration
- Will not crack, harden or oxidize over time
- Remains flexible

Passes ASTM D-1970.

PRODUCT	CANADA	COLOR	SIZE
GC98004	GC98004	Black	4" x 50"
GC98006	GC98006	Black	6" x 50"
GC98014	GC98014	White	4" x 50"
GC98016	GC98016	White	6" x 50"



2310®
TRIPOLYMER BRUSHABLE REPAIR COATING

Single-component, brushable elastic sealant with rubber-like flexibility, designed for many construction, roofing, manufacturing and industrial applications. Exhibits adhesion to many common construction materials including damp, oily or dirty surfaces. Withstands water contact quickly after application to stop leaks. Prevents rust on metal surfaces.

For use on: asphalt shingles, coated steel (Kynar 500® based finishes), concrete, vinyl, steel and more

- Cured sealant is mildew resistant
- Paintable
- Crystal clear
- Resealable
- Applies in adverse weather
- Stays flexible
- Lever-lock lids on 3-gallon pails

PRODUCT	CANADA	COLOR	SIZE
GC65200	GC65210	Clear	1 Quart
GC65300	GC65310	Clear	1 Gallon
GC65100	GC65110	Clear	3 Gallon
GC65400	—	Clear	5 Gallon

May not be sold in the state of California.
Kynar 500® is a registered trademark of Arkema Inc., and is used under license.



3300®
PROFESSIONAL GRADE POLYURETHANE SEALANT

Single-component, high-performance polyurethane sealant that withstands adverse weather conditions and cures to form a flexible weather-resistant seal.

For use on: masonry, ceramics, wood, steel, coated steel (Kynar 500® based finishes), aluminum, asphalt shingles, building paper, BUR, concrete, fiberglass and more

- Moisture cure
- Remains flexible
- Minimal shrinkage
- Non-sag formula
- Primerless adhesion on most substrates
- Paintable
- Noncorrosive
- Contains no TDI (toluene diisocyanate)

Meets ASTM C-920, Type S, Grade NS, Class 25, Use NT, A, M, G and O; Meets Federal Specification TT-S-0230 C, Type II, Class A; Meets Canadian Specification CAN/CGSB-19, 13-M87 Class 2 Non-sag, Class 25, Class M.
Kynar 500® is a registered trademark of Arkema Inc., and is used under license.

PRODUCT	CANADA	COLOR	SIZE
GC68101	—	White	10.1 fl. oz.
GC68102	—	Gray	10.1 fl. oz.
GC68103	—	Black	10.1 fl. oz.
GC68104	—	Medium Bronze	10.1 fl. oz.
GC68105	—	Bronze	10.1 fl. oz.
GC68106	—	Limestone	10.1 fl. oz.
GC68107	—	Tan	10.1 fl. oz.
GC68109	—	Aluminum Gray	10.1 fl. oz.



2315LRF®
LEAK REPAIR-FIBERED BRUSHABLE COATING

Single-component, elastic sealant featuring fibers for added strength. An ideal solution for roof leaks — will stop leaks quickly, even in damp conditions. Will function in UV, heat and intermittent foot traffic. One-step application with no primer required on most substrates. Applies in adverse temperature ranges, including damp and icy conditions. Cured coating is mildew resistant. Repairs small areas on slate, tile, shingles and asphalt roofs. Exhibits adhesion to many roofing materials, including oily or slightly dirty surfaces.

For use on: asphalt shingles, coated steel (Kynar 500® based finishes), concrete, vinyl, PVC and more

- Stops leaks quickly
- Fibered for strength
- Applies in most temperatures
- For small area repairs
- Remains flexible with a rubber-like quality
- One-step application
- Withstands water contact quickly

PRODUCT	CANADA	COLOR	SIZE
GC69100	GC69110	Clear	1 Quart
GC69101	—	Bright White	1 Quart
GC69103	GC69113	Black	1 Quart
GC69200	GC69210	Clear	1 Gallon
GC69201	—	Bright White	1 Gallon
GC69203	GC69213	Black	1 Gallon

PRODUCT	CANADA	COLOR	SIZE
GC69300	GC69310	Clear	3 Gallon
GC69301	—	Bright White	3 Gallon
GC69303	GC69313	Black	3 Gallon
GC69400	—	Clear	5 Gallon
GC69401	—	Bright White	5 Gallon
GC69403	—	Black	5 Gallon



3500™
POLYURETHANE BONDING SEALANT

Urethane sealant that cures to a tough, flexible seal. Manufactured for clay, slate, concrete and composite roof tiles, it can be used in bonding, beading and sealing applications. It contains no TDI (toluene diisocyanate).

For use on: concrete, brick, wood, tile, steel, asphalt shingles, sheet metal and more

- Both bonding and sealing applications
- One-part urethane moisture cure sealant
- Paintable
- Variety of colors available
- Fast setup
- Minimal shrinkage

PRODUCT	CANADA	COLOR	SIZE
GC35101	—	White	10.1 fl. oz.
GC35102	—	Gray	10.1 fl. oz.
GC35103	—	Black	10.1 fl. oz.
GC35104	—	Brown	10.1 fl. oz.
GC35117	—	Terra Cotta	10.1 fl. oz.

Meets ASTM C-920, Type S, Grade NS, Class 25, Use NT, A, M, G and O; Meets Federal Specification TT-S-00230 C, Type II, Class A; Meets Canadian Specification CAN/CGSB-19, 13-M87 Class 2 Non-sag, Class 25, Class M.



GEOCEL 4500®
ROOF BONDING SEALANT

Premium hybrid one-component, proprietary bonding sealant specifically designed for roofing applications and systems. The advanced formula technology results in a product that quickly withstands ponding water while bonding to many common roofing substrates. Applies, adheres and cures underwater to quickly stop leaks.

For use on: asphalt shingles, steel, concrete, EPDM, primed TPO, primed PVC, Hypalon (black only), metal, wood and more

- 2 products in 1—lap adhesive and scrim-edge sealant
- No additional adhesives or sealants needed
- Remains flexible
- Works with EPDM membranes, tapes and patches
- Can be used as a night seal and for core/test cuts
- Nonflammable formulation

PRODUCT	CANADA	COLOR	SIZE
GC55103	GC55803	Black	10 fl. oz.
GC55101	GC55801	White	10 fl. oz.

2300® CONSTRUCTION TRIPOLYMER SEALANT



Single-component, high-performance elastomeric sealant for use in a wide variety of roofing, trim, architectural metal, manufacturing, underdeck system, solar roof system and general construction applications. It offers exceptional elongation and flexibility. It has excellent adhesion to many building surfaces, even when damp.

For use on: asphalt shingles, modified bitumen, coated steel (Kynar 500® based finishes), concrete, vinyl, steel and more

- Remains flexible
- UV-resistant
- Paintable
- Resealable, may be applied over itself
- Asphalt shingle compatible

PRODUCT	CANADA	STANDARD COLORS	SIZE
GC66100	—	Crystal Clear*	10.3 fl.oz.
GC66101	—	White	10.3 fl.oz.
GC66102	—	Gray	10.3 fl.oz.
GC66103	—	Black	10.3 fl.oz.
GC66104	—	Brown	10.3 fl.oz.
GC66105	—	Bronze	10.3 fl.oz.
GC66107	—	Tan	10.3 fl.oz.
GC66108	—	Cedar	10.3 fl.oz.
GC66109	—	Almond	10.3 fl.oz.
GC66115	—	Driftwood	10.3 fl.oz.
GC66117	—	Terra	10.3 fl.oz.
GC66200	—	Crystal Clear	29.0 fl.oz.

PRODUCT	CANADA	METAL ROOF COLORS	SIZE
GC66106	—	Medium Bronze	10.3 fl.oz.
GC66110	—	Classic Green	10.3 fl.oz.
GC66113	—	Ocean Blue	10.3 fl.oz.
GC66120	—	Patriot Red	10.3 fl.oz.
GC66123	—	Sandstone	10.3 fl.oz.
GC66124	—	Sierra Tan	10.3 fl.oz.
GC66127	—	Mansard Brown	10.3 fl.oz.
GC66130	—	Hunter Green	10.3 fl.oz.
GC66131	—	Slate Gray	10.3 fl.oz.
GC66132	—	Charcoal Gray	10.3 fl.oz.
GC66133	—	Light Gray	10.3 fl.oz.
GC66134	—	Burgundy	10.3 fl.oz.
GC66135	—	Bright Red	10.3 fl.oz.
GC66136	—	Colonial Red	10.3 fl.oz.
GC66137	—	Bone White	10.3 fl.oz.
GC66138	—	Metallic Copper	10.3 fl.oz.
GC66139	—	Metallic Silver	10.3 fl.oz.
GC66141	—	Wheat	10.3 fl.oz.
GC66144	—	Jungle Green	10.3 fl.oz.
GC66147	—	Blue Waters	10.3 fl.oz.
GC66153	—	Musket	10.3 fl.oz.
GC66154	—	Blue Coral	10.3 fl.oz.
GC66155	—	Ash Gray	10.3 fl.oz.
GC66156	—	Lite Stone	10.3 fl.oz.
GC66158	—	Sandstone	10.3 fl.oz.
GC66159	—	Red	10.3 fl.oz.
GC66160	—	Taupe	10.3 fl.oz.
GC66161	—	Chocolate	10.3 fl.oz.
GC66162	—	Clay	10.3 fl.oz.
GC66163	—	Pewter Gray	10.3 fl.oz.



2300® CONSTRUCTION TRIPOLYMER SEALANT IN PLASTIC

Single-component, high-performance elastomeric sealant for use in a wide variety of roofing, trim, architectural metal, manufacturing, underdeck system, solar roof system and general construction applications. It offers exceptional elongation and flexibility. It has excellent adhesion to many building surfaces, even when damp.

2300 Construction Tripolymer Sealant Crystal Clear formula is also available in a clear plastic cartridge. The same great formula as in the fiber cartridge with the advantages of a weatherproof container.

For use on: asphalt shingles, modified bitumen, coated steel (Kynar 500® based finishes), concrete, vinyl, steel, metal, wood, masonry and more.

- Remains flexible
- UV-resistant
- Paintable
- Resealable, may be applied over itself
- Asphalt shingle compatible
- Exceptional elongation
- Excellent adhesion, even when damp

PRODUCT	CANADA	STANDARD COLORS	SIZE
GC66900	GC66850	Crystal Clear*	10.3 fl.oz.
GC66901	GC66851	White	10.3 fl.oz.
GC66902	—	Gray	10.3 fl.oz.
GC66903	GC66853	Black	10.3 fl.oz.
GC66904	GC66854	Brown	10.3 fl.oz.
GC66905	—	Bronze	10.3 fl.oz.
GC66907	—	Tan	10.3 fl.oz.
GC66908	—	Cedar	10.3 fl.oz.
GC66909	—	Almond	10.3 fl.oz.
GC66915	—	Driftwood	10.3 fl.oz.
GC66917	—	Terra	10.3 fl.oz.

Colors may not be sold in the state of California.

*Crystal Clear GC66900 is exempt from this rule except in SCAQMD counties.

Kynar 500® is a registered trademark of Arkema Inc. and is used under license.

2300 CPW TRIPOLYMER SEALANT

2300 CPW Tripolymer Sealant is specifically for use in areas regulated by SCAQMD. This sealant features a formula that is clear, paintable and immediately water resistant.

For use on: asphalt, metal, wood, brick, concrete, vinyl, glass and more

- Exceptional elongation and flexibility
- Excellent adhesion, even when damp
- UV resistant
- Paintable
- Resealable; may be applied over itself



PRODUCT	CANADA	STANDARD COLOR	SIZE
GC66700	—	Crystal Clear	10.3 fl. oz.

Colors may not be sold in the state of California. *Crystal Clear GC66100 is exempt from this rule except in SCAQMD counties.

The 29.0 fl. oz. size may not be sold in: CA, UT, PA, NY, DE, CT, MA, ME, RI, NJ, NE-OH & NE-VA.

Kynar 500® is a registered trademark of Arkema Inc. and is used under license.

Proven Products. Proven Results.

For over 40 years, the Geocel brand of caulks and sealants has been giving professionals an advantage on every job. They know the performance they expect will be there every time and every product will deliver solid results that support their goals of saving time, lowering costs and most importantly, a job done right the first time. They enjoy pride in realizing a job well done, and peace of mind knowing that sales or technical support is only a phone call away, any time.

Whether it's for tough construction jobs or small repair applications, Geocel products perform as promised and as expected. We work side-by-side with professionals to develop products they enjoy working with and ensure that each product has the performance characteristics they need and want.

So, why risk headaches down the road by working with an unproven sealant today? Look to the one who is setting the standard in caulks and sealants with proven products and results. Look to Geocel.

Contents

ROOFING G3–G11

A variety of repair and new construction solutions for every application and various substrates.

ALL PURPOSE G12

General construction and repair products for a variety of applications.

GUTTERS G13

For narrow seams and joints to stop the passage of air and moisture.

SPECIALTY G14

For repair applications involving concrete or mortar.
Also, for sealing roof penetrations in solar roof panel installations.

DRIPLESS® CAULK GUNS G15

Efficient and lightweight caulk guns that are built to last.

Wide Breadth of Technologies

Let the Geocel brand of products be your single-source for caulks and sealants that work in a wide range of sealing and repair applications. For wide or narrow joints to a multi-substrate job to tough freeze/thaw cycles and just about everything in between, the Geocel brand offers a variety of technologies to address all these applications and more.

Tripolymer

Geocel's own industry-leading, high performance formula. It offers exceptional flexibility, excellent adhesion to over 20 different substrates with minimal to no surface prep, is UV resistant, won't crack, is paintable and is available in many colors, including a Crystal Clear that won't yellow.

Hybrid

Geocel's unique hybrid blend of polymers designed for high performance with minimal shrinkage, excellent flexibility and paintability.

Polyurethane

As a technology that offers great toughness and works well on porous surfaces, polyurethanes can often be found in large joint applications—up to 1-1/4" wide.

Specialty Products

To round out the Geocel mix of products, a variety of specialty products are available to complement the other technologies.

- Roofing Tapes
- Aerosol Paints and Primer
- Pitch Pocket and Pourable Sealant

PRODUCT CATALOG



PROVEN PRODUCTS. PROVEN RESULTS.